


Servo PLC Coiled Spooler



Main Specifications

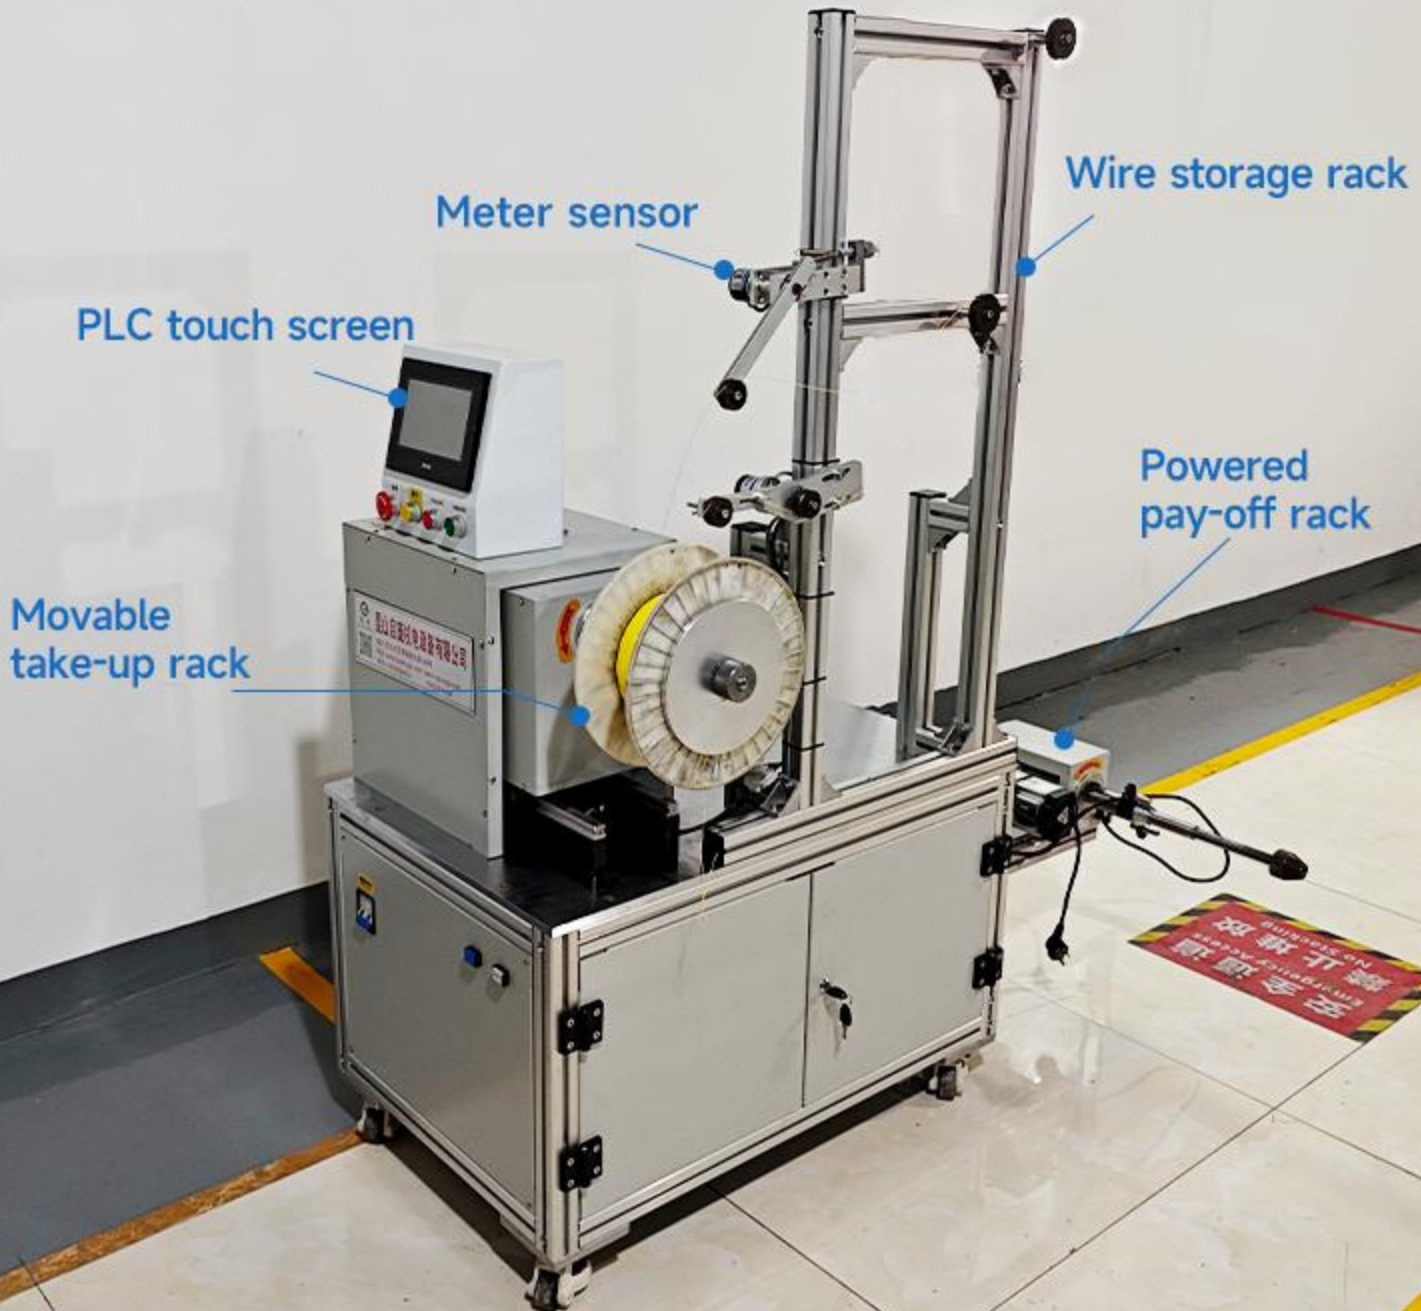

Tensioner wire diameter range: 1.0~3.5mm
(Customizable)

Tension range: 100~16000g(Customizable)

Maximum rotation diameter: 360mm

Maximum cable stroke: 170mm

Winding direction:

Clockwise/Counterclockwise

Initial cable direction:Left/right

Power supply voltage:220V/50Hz

Machine size (length, width and height):

1200*850*1350mm

Weight: 265Kg

Main Configuration

Name	Brand /Model	Name	Brand /Model
System	Lei Sai	AC servo motor	Rui Neng
Touch screen	Weiluntong	Hysteresis damper	Boxin
Reducer	Entanster	bearing	Original imported NSK
Switching power supply	Ming Wei	Cylinder	SMC
The electromagnetic valve	Air TAC	Linear Guides	Creek
Screw	TBI	Electronic components	Omron
Pneumatic components	Xing Chen	Racks, mechanical parts	Steel structure

Product Details




NO.1 PLC touch screen



NO.2 Meter sensor +
Wire storage rack



NO.3 Movable take-up rack

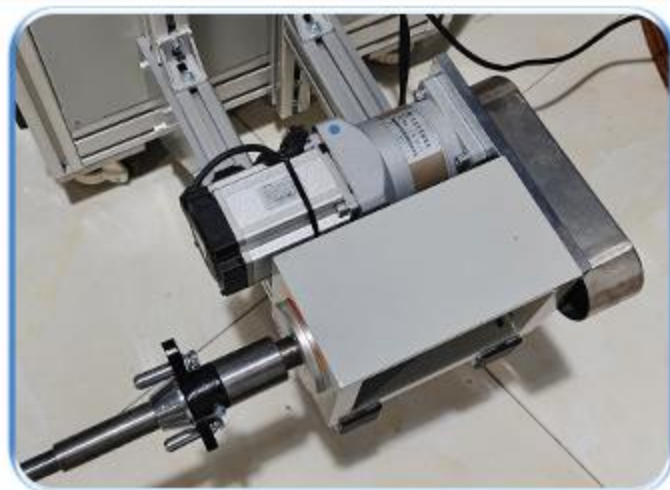

NO.4 Powered pay-off rack

Product Photo



